



OMNI-DIRECTIONAL SOLUTIONS SINCE 1909

9040 OMNITRACK HIGH CAPACITY BALL TRANSFER UNIT

REVISION # 01

Removable & reusable 'Spirolox'
circlip allows cleaning/user servicing

Available Material Options			
Part #	Load Bearing Internal Materials	Ball Material	Casing Material & Finish
9040	AISI 52100	AISI 52100	AISI 1012 ZINC/ELECTROPHORETIC (BLACK)
9040A	AISI 52100	AISI 440	AISI 1012 ZINC/ELECTROPHORETIC (BLACK)
9040Z	AISI 440	AISI 440	AISI 1012 ELECTROPHORETIC (BLACK)
9040SS	AISI 440	AISI 440	AISI 304 - NATURAL
9040PB	PHENOLIC RESIN MAIN BALL AVAILABLE FOR ALL MATERIAL OPTIONS - 35 Kg / 75 Lbs		

~ Operating temperature -20° C + 125° C (continuous)

LOAD CAPACITY 1100 Kg / 2400 Lbs

∅ 38,1 [1.5]

12,7 [0.5]


61,49 +/- 0,15
[2,421 +/- 0,006]

Centre drain
SS & Z only

Side drain
all options

∅ 60,00+0,00-0,10

[∅ 2,362+0,000-0,004]

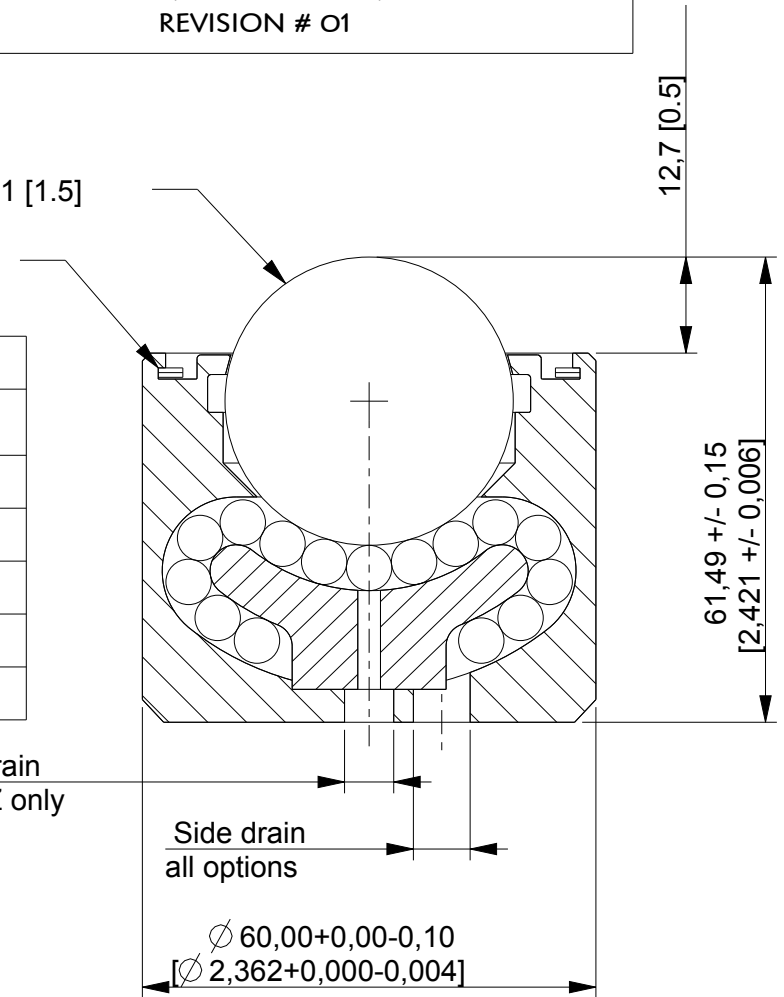

ALL DIMENSIONS IN mm [inch]
IF VIEWED AS PDF, DO NOT SCALE
IF VIEWED AS DWG, SCALE 1 : 1
TOLERANCE ± 0,25
QMF 31 ISSUE 01 : 22/06/2012

OMNITRACK
RODBOROUGH COURT
STROUD, GL5 3LR, ENGLAND

Telephone: +44 (0)1453 873 345
Fax: +44 (0)1453 878 500
info @ omnitrack.com
www.omnitrack.com

THIS DOCUMENT CONTAINS OMNITRACK
PROPERTY AND CONFIDENTIAL INFORMATION.
IT IS LOANED FOR LIMITED PURPOSES ONLY
AND REMAINS THE PROPERTY OF OMNITRACK.
IT MAY NOT BE REPRODUCED IN WHOLE
OR PART OR DISCLOSED TO THIRD PARTIES
WITHOUT THE PRIOR WRITTEN CONSENT OF
OMNITRACK. THE DOCUMENT IS TO BE
RETURNED TO OMNITRACK UPON REQUEST
AND IN ALL EVENTS UPON COMPLETION OF THE
USE FOR WHICH IT WAS LOANED